


# ZAJ350

## Explosion Proof Box



ZUOAN

### Certificate

Certificate Mark	Exd II B(+H <sub>2</sub> )T6 GB/DIP A20 TA, T6
Certificate No	CNEx13.4245
Standards	Q/320412ZAF065-2013

### Mechanical

Housing	Stainless steel 304 or 316L
IP	IP66
Cable thread hole	6pcs G3/4 or NPT3/4

### Electrical

Voltage	AC85V~AC265V
Current	≅ 500mA
Power	≅ 50W
Surge Protect	Optional, TVS6000V surge protect
Optical Fiber output	Optional, multimode or single mode
Fiber distance	25km



### Ambient

Ambient temperature	-25 to +60°C
Air pressure	80Kpa to 106Kpa
Relative Humidity	≅ 95% (no condensation)

### General

Overall size	382*308*144mm
Inner Size	240*210*101mm
Weight	14kg

### Dimension

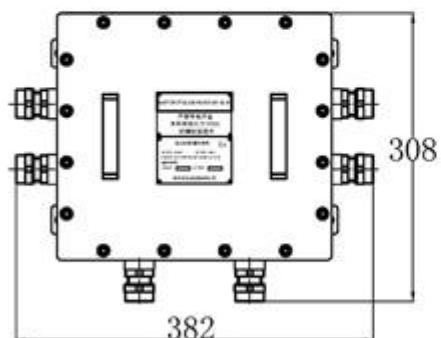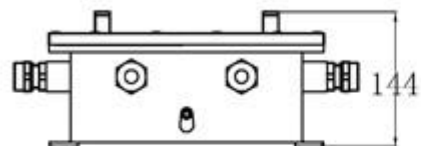

安装尺寸

