





# ZAJ360

## Explosion Proof Box

<b>Certificate</b>	
Certificate Mark	Exd II B(+H <sub>2</sub> )T6 GB/DIP A20 TA, T6
Certificate No	CNEx13.4244
Standards	Q/320412ZAF066-2013
<b>Mechanical</b>	
Housing	Stainless steel 304 or 316L
IP	IP66
Cable thread hole	6pcs G3/4 or NPT3/4
<b>Electrical</b>	
Voltage	AC85V~AC265V
Current	≅ 500mA
Power	≅ 50W
Surge Protect	Optional, TVS6000V surge protect
Optical Fiber output	Optional, multimode or single mode
Fiber distance	25km
<b>Ambient</b>	
Ambient temperature	-25 to +60°C
Air pressure	80Kpa to 106Kpa
Relative Humidity	≅ 95% (no condensation)
<b>General</b>	
Overall size	342*248*119mm
Inner Size	Φ 171*114mm
Weight	17.1kg

### Dimension

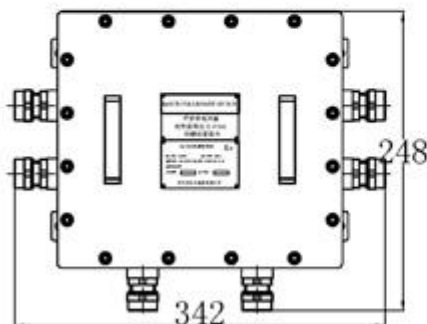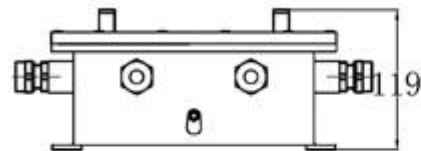

安装尺寸

